

**Denso®**

# Protal 600 CTE & CTE Low VOC

Coal Tar Epoxy & Low VOC Coal Tar Epoxy



## Uses & Applications

- Sheet piles
- Steel piles
- Non-potable water pipelines
- Treatment / storage tanks
- Many other aggressive industrial applications




# Denso®

## Protal 600 CTE & CTE Low VOC



*Protal 600 CTE provides long-term corrosion protection to steel sheet piles.*

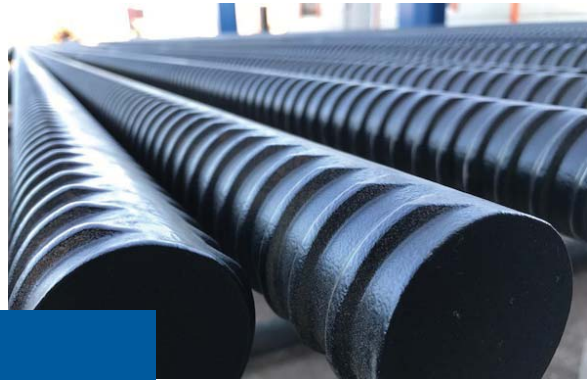

*Tie rods coated with Protal 600 CTE Low VOC. Only 0.4 lbs/gal (50 g/l) VOC.*

### Features

- Easy to spray apply & fast cure time
- High build up to 26 mils WFT (660 microns) in one coat
- Excellent abrasion resistance
- Good impact resistance
- Excellent flexibility, hardness and adhesion (3400+ psi)
- Can be used with cathodic protection systems
- Excellent resistance to water, seawater, wastewater, alkaline water and acidic water
- Exceeds AWWA C-210 for exterior
- Exceeds Corp of Engineers C-200, C200a



*Protal 600 CTE is a two-part high build coal tar epoxy that is applied with a single leg airless unit.*



*No primer is required when applying Protal 600 CTE.*

# Denso®

DENSO NORTH AMERICA

**HOUSTON:**  
9710 Telge Road,  
Houston, Texas,  
U.S.A. 77095  
Tel: 281-821-3355  
Fax: 281-821-0304

**TORONTO:**  
90 Ironside Crescent,  
Unit 12, Toronto,  
Ontario, Canada M1X1M3  
Tel: 416-291-3435  
Fax: 416-291-0898

e-mail: [info@densona.com](mailto:info@densona.com)

[www.densona.com](http://www.densona.com)

*A Member of Winn & Coales International*